


Rs301

SINGLE UNBALANCED COMPONENT SEAL

d	D	D1	L	L1
8a	20	26	11	4
8b	20	22	11	4
8c	24	26	11	8
9	24	26	11	8
10	24	26	11	8
11	24	26	11	8
12a	24	26	13	5.5
12b	24	26	13	8
12c	32	35	13	8
13	24	26	13	8
14a	28	25	13	7
14b	28	28.5	13	8
14c	32	29.5	13	8
14d	32	35	13	8
15a	32	29.5	13	8
15b	32	38	13	8
15c	35	38	13	8
16a	32	29.5	13	8
16b	35	38	13	8
16c	39	38	13	8
16d	39	42	13	8
17	39	42	13	8
18	39	42	13	8
19	39	42	13	8
20a	39	42	13	8
20b	42	45	13	10
22	42	45	13	10
23	47	50	14	10
24	47	50	14	10
25a	42	50	14	10
25b	47	50	14	10
26	47	50	14	10
28	54	57	15	10
30	54	57	15	10
32	54	57	15	10
35	60	63	16	10
38	65	68	18	12
40	65	68	18	12
45	70	73	20	12
50	85	88	23	15
55	85	88	23	15
60	105	110	30	15
70	105	110	32	15

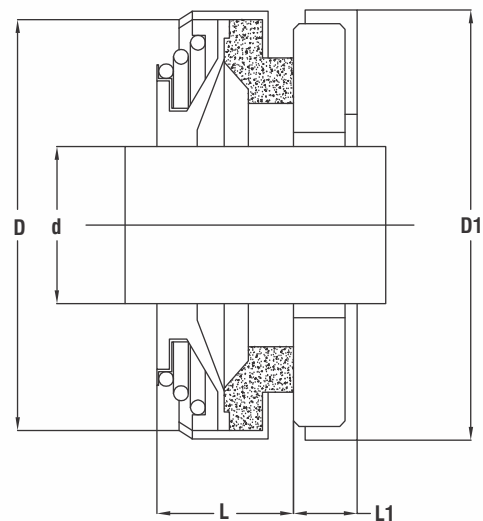

FEATURES & BENEFITS:

- ▶ Compact rubber bellows design
- ▶ Bi-directional
- ▶ Short axial length
- ▶ Common design for small European mass produced pumps
- ▶ Common to household water pumps, Jacuzzis, fountain pumps and dishwashers

OPERATING LIMITS:

- ▶ Pressure: to 85 PSI (6 Bar)
- ▶ Temperature: -4°F to +350°F / -20°C to 180°C

STANDARD MATERIALS OF CONSTRUCTION:

- ▶ **Faces:**
 - ▶ Carbon, Phenolic Carbon, Silicon Carbide, Tungsten Carbide
- ▶ **Elastomers:**
 - ▶ Buna, Viton®, Aflas®, Neoprene, EPDM
- ▶ **Metallurgy:**
 - ▶ 304