


Rs210

SINGLE SPRING ELASTOMER BELLOWS SEAL

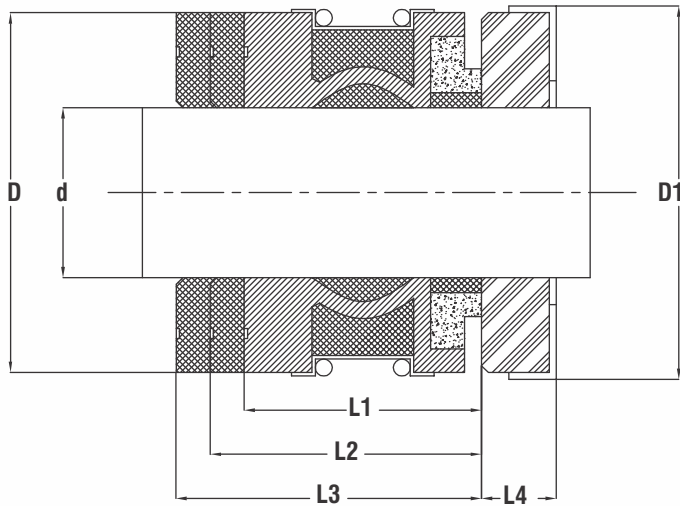

INCHES

d	D	D1	L1	L4
0.375	0.787	0.870	0.591	0.284
0.500	0.945	1.000	0.591	0.312
0.625	1.024	1.250	0.591	0.406
0.750	1.260	1.375	0.787	0.406
0.875	1.417	1.500	0.787	0.437
1.000	1.535	1.625	0.787	0.437
1.125	1.654	1.750	1.024	0.437
1.250	1.811	1.875	1.024	0.437
1.375	1.929	2.000	1.024	0.437
1.500	2.126	2.125	1.181	0.500
1.625	2.205	2.375	1.181	0.500
1.750	2.405	2.500	1.181	0.500
1.875	2.520	2.625	1.181	0.500
2.000	2.598	2.750	1.181	0.562
2.125	2.717	3.000	-	0.562
2.250	3.031	3.125	1.299	0.562
2.375	3.150	3.250	1.299	0.562
2.500	3.268	3.375	1.299	0.625
2.625	3.465	3.375	1.299	0.625
2.750	3.504	3.500	1.299	0.625
2.875	3.780	3.750	1.299	0.625
3.000	3.898	3.875	1.575	0.625



FEATURES & BENEFITS:

- ▶ Full convolution Bellows design helps compensate for face wear
- ▶ Bi-directional
- ▶ Interlocking drive band design allows for positive drive
- ▶ Design fits DIN 24960
- ▶ Interference fit of seal face minimizes effects of face stick
- ▶ Equivalent to John Crane® Type 2100, US Seal® Type G

OPERATING LIMITS:

- ▶ Pressure: 150 PSI
- ▶ Temperature: 20°F to +300°F

STANDARD MATERIALS OF CONSTRUCTION:

- ▶ **Faces:**
 - ▶ Carbon Graphite (Resin Impregnated), Antimony - Impregnated Carbon, Silicon Carbide, Tungsten Carbide
- ▶ **Elastomers:**
 - ▶ Buna, Viton®, Aflas®, Neoprene, EPDM
- ▶ **Metallurgy:**
 - ▶ 304, 316, Monel